Centre Number			Candidate Number		
Surname					
Other Names					
Candidate Signature					



General Certificate of Education Advanced Subsidiary Examination January 2009

Physics B: Physics in Context PHYB2

Unit 2 Physics Keeps us Going

Module 1 Moving People, People Moving Module 2 Energy and the Environment

Thursday 15 January 2009 1.30 pm to 2.45 pm

For this paper you must have:

- a pencil and a ruler
- a calculator
- a Data and Formulae Booklet.

Time allowed

• 1 hour 15 minutes

Instructions

- Use black ink or black ball-point pen.
- Fill in the boxes at the top of this page.
- Answer all questions.
- You must answer the questions in the spaces provided. Answers written in margins or on blank pages will not be marked.
- Do all rough work in this book. Cross through any work you do not want to be marked.


Information

- The marks for questions are shown in brackets.
- The maximum mark for this paper is 70.
- You are expected to use a calculator where appropriate.
- A Data and Formulae Booklet is provided as a loose insert.
- You will be marked on your ability to:
 - use good English
 - organise information clearly
 - use specialist vocabulary where appropriate.

Advice

 You are advised to spend about 20 minutes on Section A and about 55 minutes on Section B.





SECTION A

Answer all questions in this section.

			There are 20 marks in this section.
1		_	ifter lifts a weight of 1500 N through a height of 0.35 m in a time of 0.85 s. the mean power developed by the weightlifter.
			power W
2			(2 marks) g event at the Olympic games, the centre of mass of a diver falls 10 m before he water.
2	(a)	Shov	w that the diver's speed when she reaches the water is about $14 \mathrm{ms}^{-1}$.
		Forn	nula to be used
		Subs	stitution and answer
			(2 marks)
2	(b)	(i)	On entering the water the vertical speed of the diver of mass 45 kg is reduced to zero in 0.54s with uniform deceleration. Calculate the resultant force that produces this vertical deceleration.
			force



2	(b)	(ii)	Describe two ways in which the decelerating force is exerted on the diver.	
		first	way	
		seco	nd way	
			(2 mari	ks)
3	man	to hau	hows a man participating in a 'strong man' competition. The event requires the all a concrete block along a horizontal path for a distance of 15 m. The frictional een the block and the path is 2800 N.	
			Figure 1	
			concrete block path	
3	(a)		rope is inclined at an angle of 20° to the horizontal. ulate the minimum force that the man must exert on the rope to move the block.	
			force(1 max	N rk)
3	(b)	Calc	ulate the minimum work that the man has to do to complete the event.	

Turn over >

(1 mark)

work done J



4 The table below indicates some positions of a person carrying out a bungee jump from a high bridge.

Tick the appropriate box(es) to show the forms that the jumper's energy takes at the different stages of the jump.

Energy forms Position	kinetic energy	gravitational potential energy	elastic potential energy
at the instant the			
jumper steps off the			
bridge			
at the instant the			
elastic bungee rope just			
becomes taut			
at the instant the			
jumper reaches the			
lowest point of the			
jump			

(3 marks)

5	A solar panel fitted to a spacecraft has an area of one square metre. The spacecraft begins its
	journey to the Sun from a low Earth orbit where the solar panel receives energy at a rate of
	$1400\mathrm{Js}^{-1}$.

Calculate the rate at which it will receive energy when it has travelled $\frac{1}{10}$ of the way to the Sun.

rate at which energy is received		J	s^{-1}
	2 mc		

U	the central heating in houses. Explain why the resistance of a negative temperature coefficient (ntc) thermistor decreases as the temperature rises.



(2 marks)

7	The wire in an electric heater has a resistance of 75Ω . It is 9.5 m long and has a
	cross-sectional area of 1.4×10^{-7} m ² .
	Calculate the resistivity of the material from which the wire is made.
	Give an appropriate unit for your answer.

resistivity (3 marks)

20

Turn over for the next question




SECTION B

Answer all questions in this section.

There are 50 marks in this section.

8 Figure 2 shows the variation of the speed, v, of a sprinter with time, t, from the time the starting pistol is fired until the sprinter reaches the finishing line during a 100 m sprint.

Figure 2

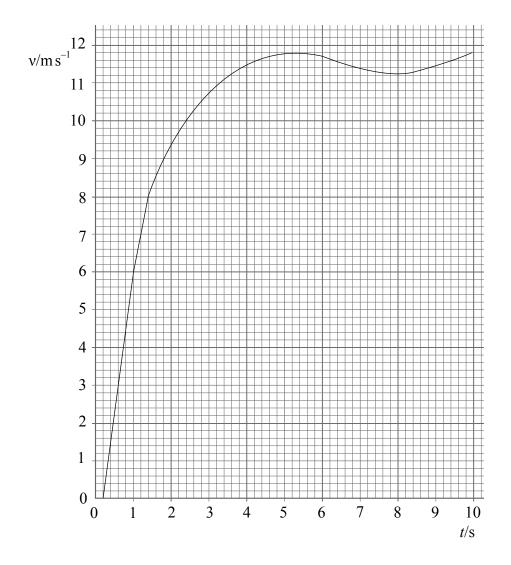

8	(a)	Explain why the graph does not go through the origin.
		(1 mark)




8	(b)	Determine the acceleration of the sprinter 3.5 s after the start of the race. Give an appropriate unit for your answer.
8	(c)	acceleration
		distance(4 marks)
8	(d)	Describe briefly how the data for the sprinter's velocity–time graph shown in Figure 2 could have been collected.

10



9 Figure 3 shows the flight of a cricket ball hit by a batsman at 30° to the horizontal at a speed of 22 m s⁻¹. The ball reached a fielder without bouncing and was caught at the same height as it was hit. The effect of air resistance on the cricket ball is negligible.

Figure 3



9 (a) (i) Calculate the vertical speed of the ball at the instant it left the bat.

vertical speed	$m s^{-1}$
-	(1 mark)

9 (a) (ii) Show that the ball was in the air for about 2.2 s.

(3 marks)


9 (a) (iii) How far did the ball travel horizontally before it was caught?

distance m (1 mark)

9	(b)	(i)	A tennis ball is about the same size as a cricket ball but has a lower mass. By considering the energy changes that take place, explain why a tennis ball hit at the same speed and angle as the cricket ball would be unlikely to reach the fielder without bouncing.
			(3 marks)

9 (b) (ii) Draw on **Figure 4** the path you would expect a tennis ball to follow when hit at the same speed and angle as the cricket ball.

Figure 4



(2 marks)

10



10	thick	ctory roof has an area of 600 m^2 . It is made from corrugated iron sheets which have a coating of insulating material to reduce energy loss. U -value of the sheet is $0.45 \text{ W m}^{-2} \text{K}^{-1}$.
10	(a)	The outside temperature is 5.0 °C and the temperature in the factory is 24 °C. Calculate the rate at which energy is transferred through the roof.
		rate of transfer of energy
10	(b)	The electricity for heating, lighting and running the machinery in the factory comes from the National Grid at a cost of 11 p per kWh. The roof could have been made of corrugated iron sheet with extra insulation that reduces the <i>U</i> -value to 0.19 W m ⁻² K ⁻¹ . What would be the cost saving each day for the same temperature conditions as those in part (a)? Give your answer in pence (p).
		cost saving per day



10	(c)	Other than insulating the walls and roof, discuss three ways of producing and efficiently using electricity to reduce the factory's carbon footprint. In each case, explain why your suggestion would reduce carbon emissions.
		The quality of your written communication will be assessed in this question.
		(6 marks)

11




11	To power a small village at peak times requires a mean power of 450 kW. An engineer suggests two options for providing the power. The first is a wind turbine and the second is a bank of solar cells.			
11	(a)	(i)	The efficiency of the wind turbine is 20%. Assuming a wind speed of 8.0 m s ⁻¹ calculate the length of the blades of the turbine that would be needed. density of air = 1.30 kg m ⁻³	
			length of blades m (4 marks)	
11	(a)	(ii)	A solar cell has an efficiency of 20%. The average intensity of the Sun's radiation is 210 W m ⁻² . Assuming that the Sun's radiation falls normally on the solar cells, calculate the area of solar cells that would provide a mean power output of 450 kW.	
			area m² (2 marks)	



11 (b) To provide a useful supply, a bank of solar cells consists of many cells connected in a series and parallel array. **Figure 5** shows the principle using a smaller number of cells than is used in practice.

Figure 5



11	(b)	(i)	What is the advantage of connecting the cells in series?
			(1 mark)
11	(b)	(ii)	Explain the advantage of connecting the cells in parallel.
			(2 marks)

Question 11 continues on the next page



11

11	(c)	Even if both of the proposed supplies are installed and in working order there may still be no power available. Explain why this could happen and what might be done to provide suitable back-up power.
		(2 marks)




12	The heater in a kettle, designed to operate from the 12 V battery in a car, has a power rating of 130 W.			
12	(a)	Calculate the current drawn from the battery by the kettle.		
12	(b)	current		
		time minutes (3 marks)		
12	(c)	The internal resistance of the battery affects the efficiency of the transfer of energy from the battery to the kettle. Explain what causes internal resistance and why this affects the efficiency.		
		(3 marks)		

END OF QUESTIONS



8

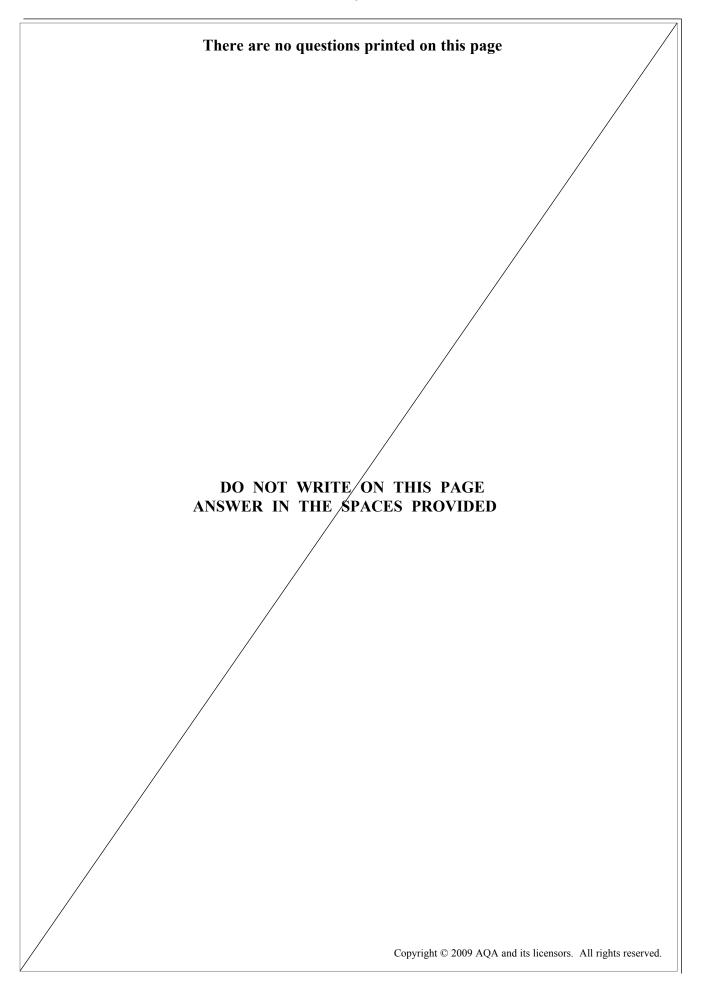





Physics (B) Physics in Context Unit 2 Physics Keeps us Going

PHYB2

Data and Formulae Booklet

FUNDAMENTAL CONSTANTS AND OTHER NUMERICAL DATA

OTHER	TVOIVEDER	CINE DINIII	
Quantity	Symbol	Value	Units
speed of light in vacuo	c	3.00×10^{8}	$m s^{-1}$
Planck constant	h	6.63×10^{-34}	Js
gravitational constant	G	6.67×10^{-11}	N m ² kg ⁻
gravitational field strength	g	9.81	N kg ⁻¹
acceleration due to gravity	g	9.81	$\mathrm{m}\;\mathrm{s}^{-2}$
electron rest mass	$m_{ m e}$	9.11×10^{-31}	kg
	$m_{ m e}$	$5.5 \times 10^{-4} \mathrm{u}$	
electron charge	e	-1.60×10^{-19}	C
proton rest mass	$m_{ m p}$	$1.67(3) \times 10^{-27}$	kg
	$m_{ m p}$	1.00728 u	
neutron rest mass	$m_{ m n}$	$1.67(5) \times 10^{-27}$	kg
	m_{n}	1.00867 u	
permeability of free space	\mathcal{E}_{o}	8.85×10^{-12}	$F m^{-1}$
molar gas constant	R	8.31 ј	$K^{-1} \text{ mol}^{-1}$
Boltzmann constant	k	1.38×10^{-23}	$J K^{-1}$
Avogadro constant	N_{A}	6.02×10^{23}	mol^{-1}
Wien constant	α	2.90×10^{-3}	m K


Particle Properties

Properties of quarks antiquarks have opposite signs

type charge		Baryon number	strangeness
u	$+\frac{2}{3}e$	$+\frac{1}{3}$	0
d	$-\frac{1}{3}e$	+ \frac{1}{3}	0
s	$-\frac{1}{3}e$	$+\frac{1}{3}$	-1

GEOMETRICAL EQUATIONS arc length

410 10115111	, ,
circumference of circle	$2\pi r$
area of circle	πr^2
surface area of sphere	$4 \pi r^2$
volume of sphere	$\frac{4}{3}\pi r^3$
surface area of cylinder	$2\pi rh$
volume of cylinder	$\pi r^2 h$



 $c^2 = a^2 + b^2$

 $r\theta$

Unit Conversions

$1.661 \times 10^{-27} \text{ kg}$
$3.15 \times 10^{7} \mathrm{s}$
$3.08 \times 10^{16} \mathrm{m}$
3.26 ly
$9.45 \times 10^{15} \mathrm{m}$

Properties of Leptons

	Lepton Number
$\begin{array}{c} \textit{particles:} \\ e^-, \nu_e^-; \mu^-, \nu_\mu^-; \tau^-, \nu_\tau \end{array}$	+1
antiparticles: $e^+, \overline{\nu_e}; \mu^+, \overline{\nu_\mu}; \tau^+, \overline{\nu_\tau}$	-1

AS FORMULAE

Waves

Quantum Physics and Astrophysics

wave speed	$c = f \lambda$	photon energy	E = hf
period ·	$T = \frac{1}{f}$	Einstein equation	$hf = \varphi + E_{k(\max)}$
r	J	line spectrum equation	$hf = E_1 - E_2$
intensity	$I = \frac{P}{A}$	de Broglie wavelength	$\lambda = \frac{h}{p} = \frac{h}{m\nu}$
stretched string frequency	$f = \frac{1}{2L} \sqrt{\frac{T}{\mu}}$	Doppler shift for $v \le c$	$\frac{\Delta f}{f} = -\frac{\Delta \lambda}{\lambda} = \frac{v}{c}$
beat frequency	$f = f_1 - f_2$	Wien's law	$\lambda_{\max} T = 0.0029 \mathrm{m}\mathrm{K}$
fringe spacing	$w = \frac{\lambda D}{s}$	Hubble law	v = H d
diffraction grating	$n\lambda = d \sin \theta$	intensity for a point source	$I = \frac{P}{4\pi r^2}$
diffraction grating			77.0
half beam width	$\sin\theta = \frac{\lambda}{a}$	Elect	tricity
	c	current	$I = \frac{\Delta Q}{\Delta t}$
refractive index of a substance	$n = \frac{c}{c_s}$	electromotive force	$\varepsilon = \frac{E}{O}$
6 4 1:6641-4 6		(emf)	Q
for two different substances of refractive index n_1 and n_2	$n_1 \sin \theta_1 = n_2 \sin \theta_2$		$\varepsilon = IR + Ir$
critical angle	$\sin \theta_c = \frac{n_2}{n_1} \text{ for } n_1 > n_2$	resistance	$R = \frac{V}{I}$
Mechan	ics	resistors in series	$R = R_1 + R_2$
speed or velocity	$v = \frac{\Delta s}{\Delta t}$	resistors in parallel	$\frac{1}{R} = \frac{1}{R_1} + \frac{1}{R_2}$
acceleration	$a = \frac{\Delta v}{\Delta t}$	resistivity	$\rho = \frac{RA}{L}$
equations of motion	v = u + at	power	$P = VI = I^2 R = \frac{V^2}{R}$
	$s = \frac{(u+v)}{2}t$	potential divider formula	$V_{\rm o} = \left(\frac{R_{\rm l}}{R_{\rm l} + R_{\rm 2}}\right) \times V_{\rm i}$
	$v^2 = u^2 + 2as$	energy	E = VIt
	$s = ut + \frac{1}{2}at^2$	efficiency	input power
force	$F = ma$ $\Delta E_{\mathfrak{p}} = mg\Delta h$	• 	
change in potential energy	,		
kinetic energy	$E_{\rm k} = \frac{1}{2} m v^2$		
momentum	p = mv	Energy production	n and transmission
impulse	$F\Delta t = \Delta(mv)$	rate of heat transfer by	n and transmission
spring stiffness	$k = \frac{F}{\Delta L}$	conduction	$=UA\ \Delta\theta$
energy stored for $F \propto L$	$E = \frac{1}{2} F \Delta L$	maximum power for a wind turbine	$=\frac{1}{2}\pi r^2 \rho v^3$
work done	W = Fs		
power	$P = \frac{\Delta W}{\Delta t} = Fv$		
density	$a = \frac{m}{m}$		

 $\rho = \frac{m}{V}$

conduction	$= UA \Delta \theta$
maximum power for a wind turbine	$=\frac{1}{2}\pi r^2 \rho v^3$

density